

SECONDARY ORIENTATION

Designed for final orientation of asymmetric, pre-printed or labeled containers.




Rotary Models (PHO)

For applications requiring special handling and/or high speed operation. Available in various frame sizes, multiple configurations, and mono-block design with unscrambler.

In-Line Models (ILO)

Low to moderate speed in-line orienters. With the ease of changeovers, allowing the accommodation of a wide range and shape of containers.

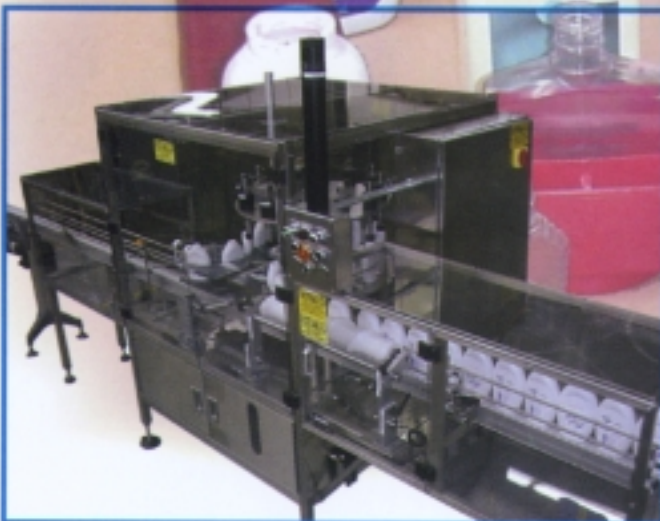

Features and options:

- Stainless steel or painted carbon
- PLC controlled
- Timing screw infeed
- Vision system
- Barcode reader
- Toolless changeover



OMEGA DESIGN CORPORATION

211 Philips Road ■ Exton, PA 19341-1336
Tel: 610-363-6555 ■ FAX: 610-524-7398
www.omegadesign.com ■ e-mail: sales1@omegadesign.com

